

Motala 2000 Design Options

Hold the button
in 10 sec



Motala 2000 design can be adapted in many different ways to blend in with modern architecture and environments. The design options are presented in this folder to facilitate planning and decision making. (O) Option. (*) Vinyl flooring.

Platform



Standard




Exclusive Oak (O)




Exclusive Steel (O)

Floors




Grey 3040383*




Green 3040780*



Yellow 3040772*



Grey rubberfloor SC009 (O)

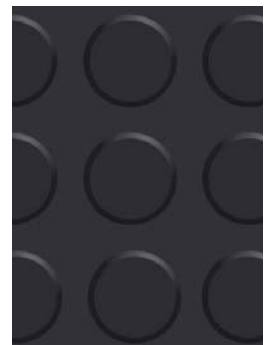

Black rubberfloor SC001(O)



Dark oak 11522* (O)




Classic oak 11542* (O)



Cherry 11492* (O)




Light granit 3116561* (O)

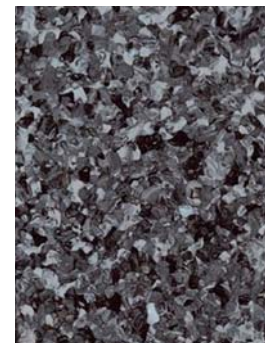


Dark granit 3116568* (O)

Doors

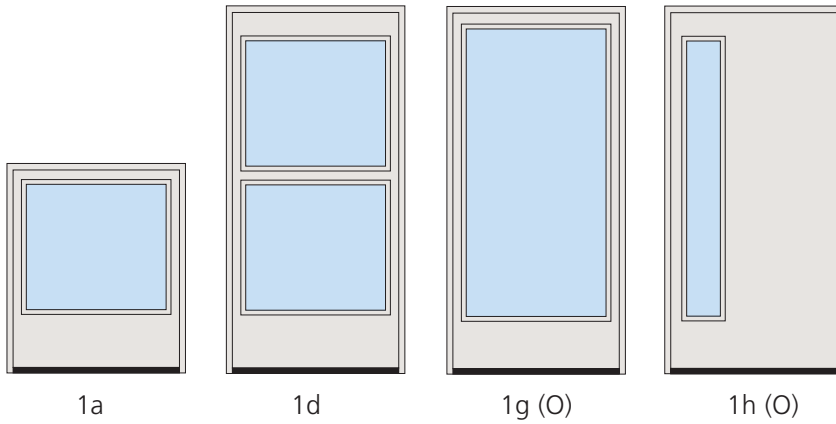

- 1h is available as certified fire door EI30/EW60.
- 1d is available as certified fire door EI30.

Shaft Glazing

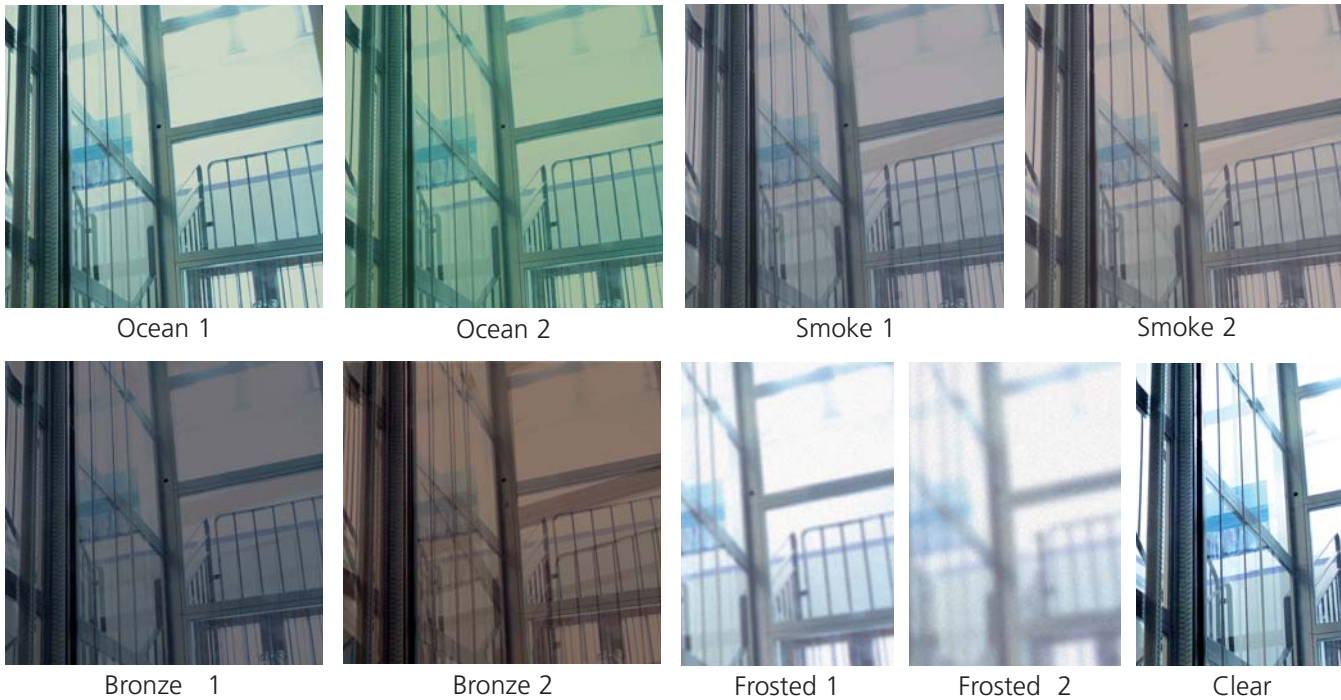

- Automatic swing doors.
- Extra wide doors (1000mm).
- Doors with height 1900mm or 2100mm.
- Stainless steel or wooden door handle.
- Hidden door closer.
- Key switch operation.
- Remote landing call station for easier access.
- Elbow push.



- Emergency telephone.
- Floor indicator.
- Audible announcements (voice annunciation).
- Flip chair.
- Electrical emergency lowering.
- Automatic locking.
- Ramp.
- Factory powder coated in most RAL colours.

Installation examples of shaft size 1250x1560 mm

Lift for indoor installation only


Motala 2000 has its own self-supporting shaft. It does not require a supporting wall as all the forces are directed down to the pit.

Control panel is integrated into highest floor door frame.


Doors fitted in the wider sides can be supplied in 900 or 1000mm widths. They can be positioned centrally or offset. The doors illustrated are 900mm wide.

Lintel height with automatic door operator is door height + 200mm


Lintel height with manual door closer is door height + 100mm.

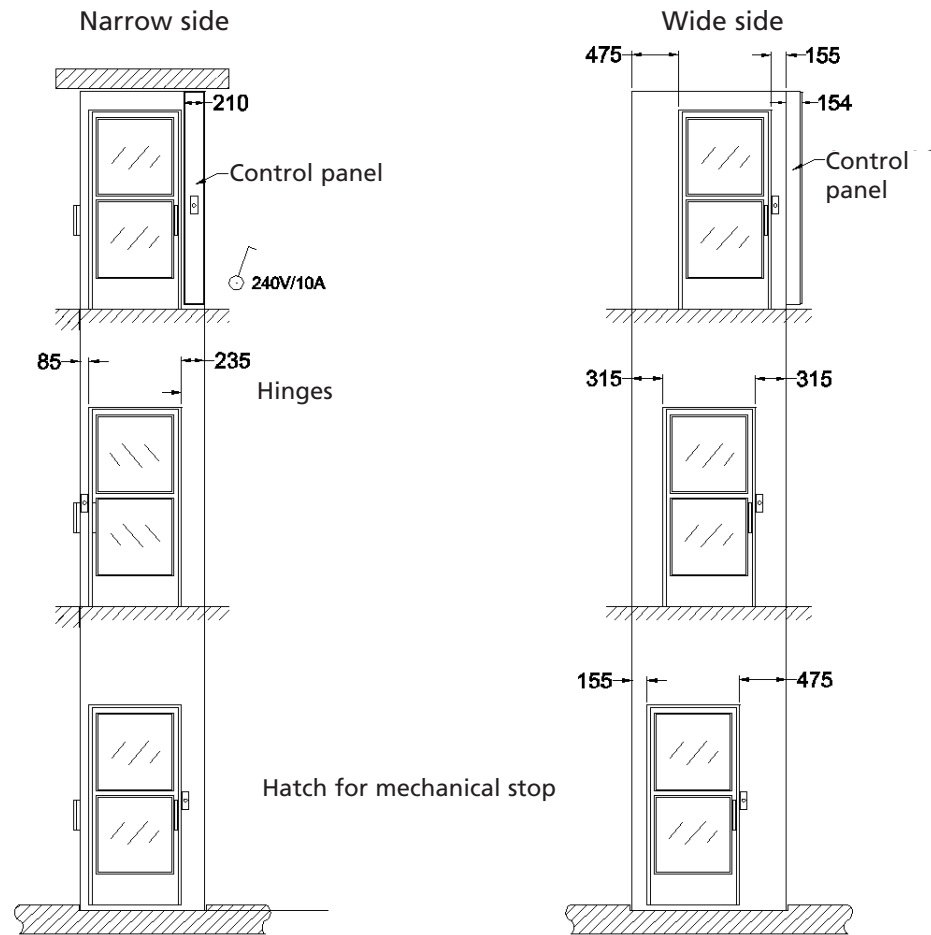

Shaft installation space refers to the floor opening and free vertical space on each level needed for installation of the lift. This is 30mm larger than the finished elevator shaft dimensions. (The example illustrated is for the platform size 1120x1480mm, shaft size 1250x1560mm).



The pit floor must be smooth, in level and dust-free. The pit must be 60mm deep, for the lift floor to be in level with the bottom floor. The elevator can also be installed without a pit, when an aluminum ramp option is ordered.

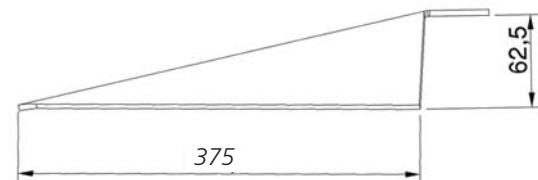

The shaft is made of aluminium profiles and sheet metal sandwich panels with mineral wool insulation. The shaft is not fire rated. Doors and door frames can be ordered in classes EI30/EW60, whereas the rest of the shaft needs to be fire protected locally. Plasterboard can be screwed directly to the shaft,

(no closer than 10cm from the edges of the shaft which may contain cables). Please note the shaft wall is 35mm thick while the wall on the lift drive side is only 25mm.

Design guide

This brochure is intended to provide an overview and we reserve the right to change designs or specifications at any time. No claims shall be interpreted as warranties or commitments, express or implicit, for any product, its suitability for different applications or quality, or as an addendum to a purchase contract. There may be small differences between colours printed and actual colours. Motala, Motala ©2000 and MC 2000 are trademarks owned by Motala Hissar AB.



Product specification

- Travel:** Max 15 m.
- Speed:** 0.15 m/s.
- Stops:** 2-6 (Motala 2000 Home max 5).
- Doors:** Swing door 900 x 2000 mm.
- Rated load:** 500 kg (400 kg for Motala 2000 Home).
- Headroom:** 2230 mm above top finished floor (1300mm half-door option available).
- Supply voltage:** Single phase 230-240 V / 10 A.
- Drive system:** Drive system: guided chain system with lifecycle greased gear and 0.55 kW asynchronous motor. Safety gear and overspeed governor.
- Shaft:** Self-supporting enclosure. No need for conventional shaft. Shaft height on top floor is 2200 mm or 1300 mm with half-door*, lift shaft can be glazed on all sides.
- Pit:** 60 mm depth, alternatively a ramp.
- Platform:** L-shaped platform with safety edge.
- Control system:** MHC1 Lift computer.
- Emergency lowering:** Manual or electric emergency lowering to the closest level.
- Alarm:** Alarm: Battery-powered, automatically recharging alarm system. Emergency buzzer. Optionally, two-way voice connection to 24-hour manned service centre.
- Certification** 2006/42/EC compliant to European Union Machinery Directive and European Harmonized Standard EN81-41.

* with half-door, travel span is between 0.9 -3m

Motala 2000 is available in three different versions:

- Motala 2000** for public buildings
- Motala 2000 Home** for private villas
- Motala 2000 XL** with extra large platform

	Motala 2000 Home	Motala 2000	Motala 2000 XL
Shaft size	1150 x 950	1150 x 1560	1150 x 1760
Platform size	1020 x 870	1020 x 1480	1020 x 1680
Shaft size	1250 x 950	1250 x 1560	1250 x 1760
Platform size	1120 x 870	1120 x 1480	1120 x 1680
Shaft size	1350 x 950	1350 x 1560	1350 x 1760
Platform size	1220 x 870	1220 x 1480	1220 x 1680

Well size is shaft size + 30mm

Motala Hissar AB

Luxorgatan 1 Box 4029 SE-591 04 Motala SWEDEN

Tel. +46 141 23 70 50 Fax +46 141 23 70 51 www.motalahissar.se

